


Type 01F D-sub Connector


VFS2000/3000/4000/5000 Series

• Wire connection specifications

Lead wire for both solenoid A and B sides in manifold are connected to connector terminal as COM specifications.

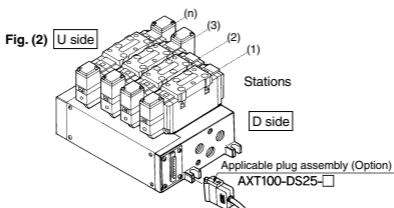

Internal Wiring of Manifold

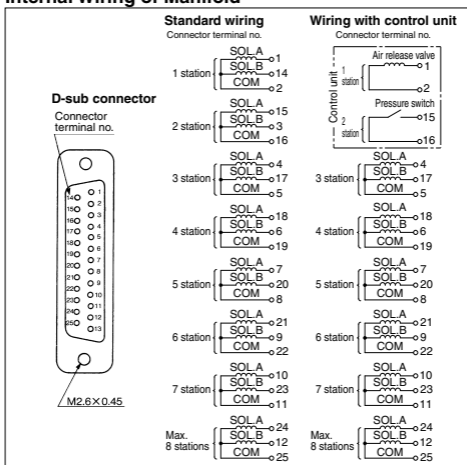

Note 1) Maximum stations are 8.

Note 2) There is no polarity.

Note 3) Indication of stations are one station from D side regardless of the connector mounting side, D or U.

Applicable Plug Assembly (Option)

Assembly part no.	Cable length	Component parts
AXT100-DS25-015	1.5 m	Plug: MIL standard D type connector 25 terminals Cable: 25 cores wire x 0.3 mm ²
AXT100-DS25-030	3 m	
AXT100-DS25-050	5 m	
AXT100-DS25-080	8 m	
AXT100-DS25-100	10 m	
AXT100-DS25-150	15 m	
AXT100-DS25-200	30 m	
AXT100-DS25-300	20 m	

Cable Color List of Each Terminal No.

Terminal no.	1	2	3	4	5	6	7	8	9	10	11	12	13
Lead wire color	Black	Brown	Red	Orange	Yellow	Pink	Blue	Purple	Gray	White	White	Yellow	Orange
Dot marking	—	—	—	—	—	—	—	White	Black	Black	Red	Red	Red

Terminal no.	14	15	16	17	18	19	20	21	22	23	24	25
Lead wire color	Yellow	Pink	Blue	Purple	Gray	Orange	Red	Brown	Pink	Gray	Black	White
Dot marking	Black	Black	White	—	—	Black	White	White	Red	Red	White	—