


10/21-CQS Series 11/22-CQS

$\varnothing 12, \varnothing 16, \varnothing 20, \varnothing 25$ Compact Cylinder

How to Order

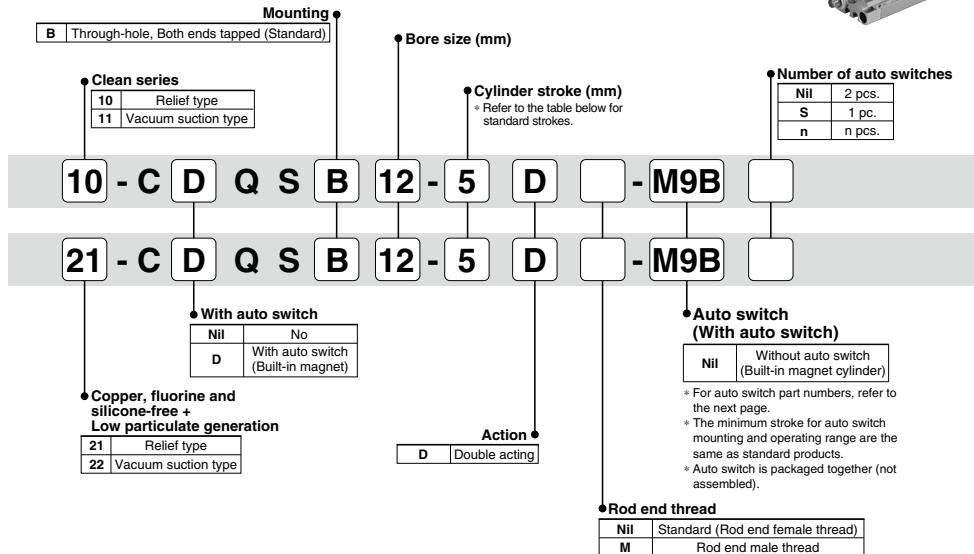

Model

	Model	Bore size (mm)	Port size	Relief port	Action	Standard stroke (mm)
Relief type	10-21-CQSB12	12	M5 x 0.8	M5 x 0.8	Double acting Single rod	5, 10, 15, 20, 25, 30
	10-21-CQSB16	16				5, 10, 15, 20, 25, 30, 35, 40, 45, 50
	10-21-CQSB20	20				5, 10, 15, 20, 25, 30
	10-21-CQSB25	25				5, 10, 15, 20, 25, 30, 35, 40, 45, 50
	11-22-CQSB12	12				
Vacuum suction type	11-22-CQSB16	16				
	11-22-CQSB20	20				
	11-22-CQSB25	25				

Specifications

Item	Bore size (mm)	12/16/20/25
Proof pressure		1.5 MPa
Maximum operating pressure		1.0 MPa
Minimum operating pressure	$\varnothing 12, \varnothing 16: 0.07$ MPa, $\varnothing 20, \varnothing 25: 0.05$ MPa	
Ambient and fluid temperature		Without auto switch : -10°C to 70°C With auto switch : -10°C to 60°C (No freezing)
Cushion		None
Piston speed		30 to 400 mm/s
Stroke length tolerance		± 1.0 %
Mounting		Through-hole, Both ends tapped
Grease		10-11: Fluorine grease 21-22: Lithium soap based grease
Cleanliness class (ISO class)		10-21: Class 4, 11-22: Class 3

Suction Flow Rate of Vacuum Suction Type (Reference values)

Size	Suction flow rate L/min (ANR)
12/16/20/25	5



Auto Switch Specifications (Refer to the **WEB catalog** for detailed specifications and auto switches not in the following table.)

Type	Auto switch part no.	Load voltage	Load current range	Indicator light	Application
Reed auto switch	D-A93	24 VDC, 100 VAC	5 to 40 mA, 5 to 20 mA	○	Relay, PLC
Solid state auto switch	2-wire D-M9B	24 VDC (10 to 28 VDC)	2.5 to 40 mA	○	24 VDC Relay, PLC
	3-wire D-M9N, D-M9P	28 VDC or less	40 mA or less	○	IC circuit, Relay, PLC

Refer to page 889 for the applicable auto switch list.

PLC: Programmable Logic Controller

Directional Control Valves

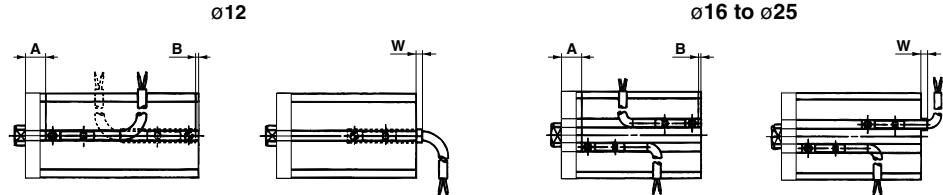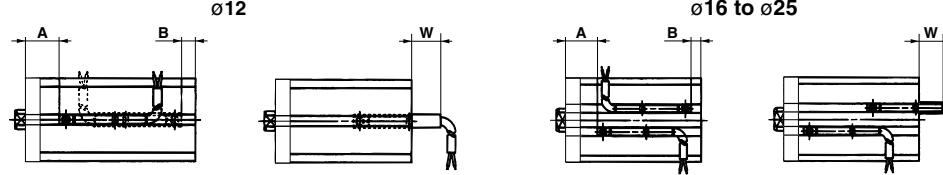Auto Switch Proper Mounting Position (Detection at Stroke End)**D-A93****D-M9B/M9N**

Bore size (mm)	D-A93			D-M9B/M9N/M9P		
	A	B	W	A	B	W
12	11.5	0.5	4	15.5	4.5	5.5
16	12	0	4.5	16	4	6
20	16	3.5	1	20	7.5	2.5
25	17	5.5	-1	21	9.5	0.5

Air Cylinders

Rotary Actuators

Air Grippers

Air Preparation Equipment

Modular F. R.

Pressure Control Equipment

Fittings & Tubing

Flow Control Equipment


Pressure Sensors/Pressure Sensors

⚠ Specific Product Precautions

Be sure to read this before handling.



Mounting**⚠ Caution**

- When a magnetic object comes in close proximity with the cylinder as shown in the right figures (including proximity on one side only), the auto switch operation may become unstable. Consult with SMC in such cases.


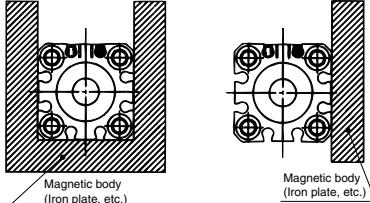


Standard: 10-CQSB12 to 25, 21-CQSB12 to 25



Ø12

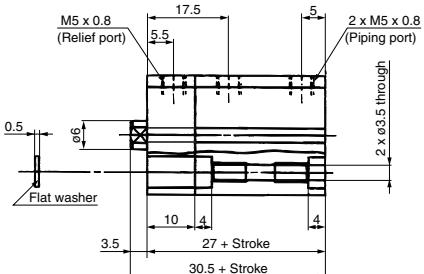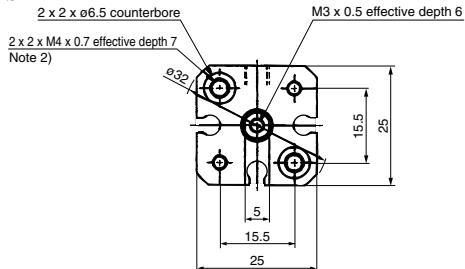



Ø16

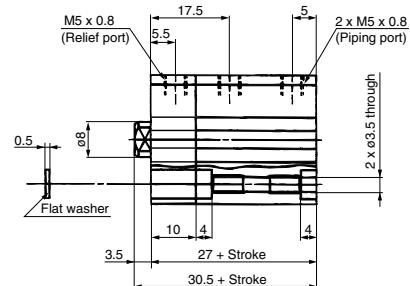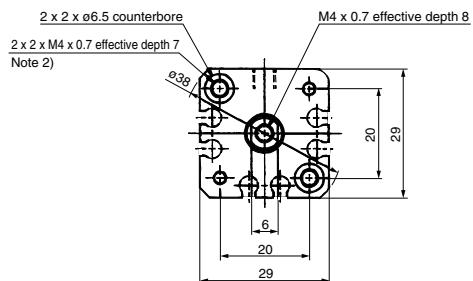

Ø20

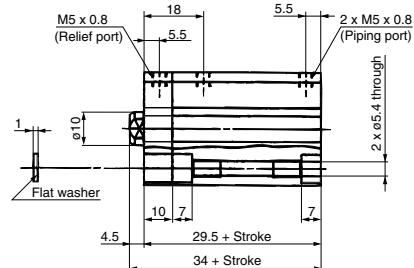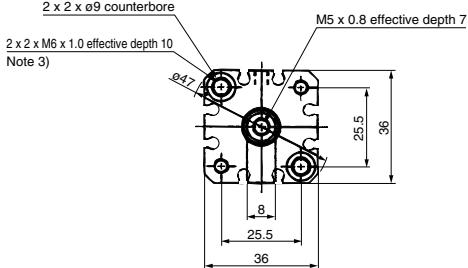

Ø25

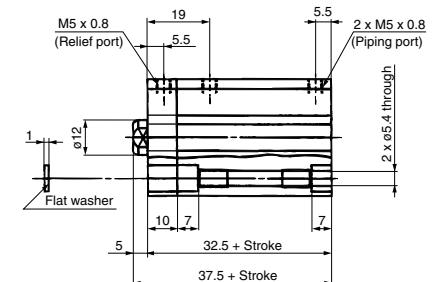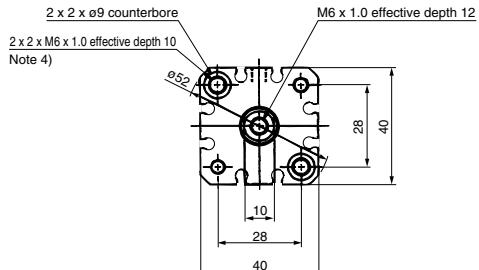













Note 1) Standard strokes available in 5 mm increments.

Note 2) Through-hole in case of 5 mm stroke.

Note 3) Through-hole in case of 5 to 15 mm stroke.

Note 4) Through-hole in case of 5 or 10 mm stroke.

Rod End Male Thread: 10-CQSB12 to 25, 21-CQSB12 to 25

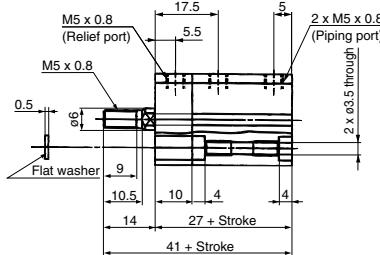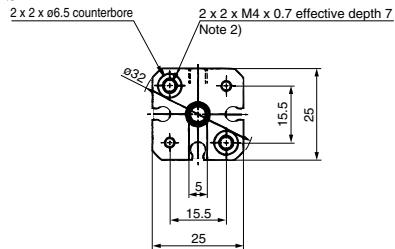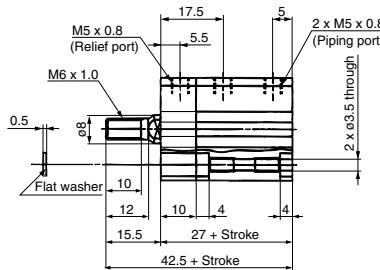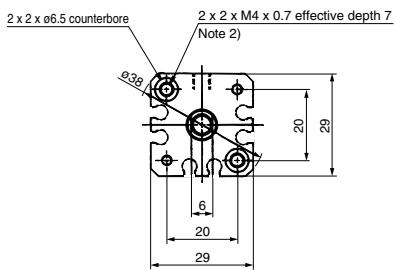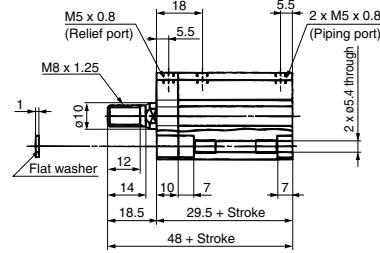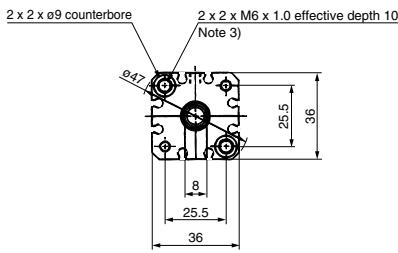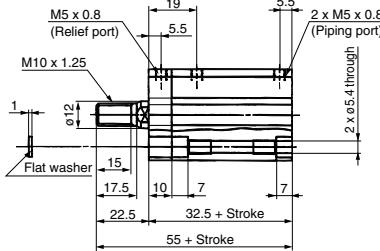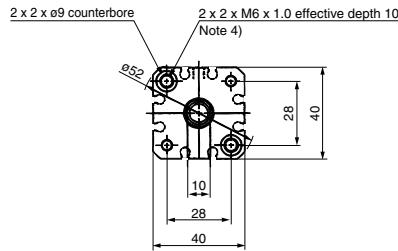Ø12**Ø16****Ø20****Ø25**

Note 1) Standard strokes available in 5 mm increments.

Note 2) Through-hole in case of 5 mm stroke.

Note 3) Through-hole in case of 5 to 15 mm stroke.

Note 4) Through-hole in case of 5 or 10 mm stroke.

Directional Control Valves

Air Cylinders

Rotary Actuators

Air Grippers

Air Preparation Equipment

Modular F. R.



Fittings & Tubing

Flow Control Equipment



Pressure Switches/ Pressure Sensors

With Auto Switch: 10-CDQSB12 to 25, 21-CDQSB12 to 25



Ø12

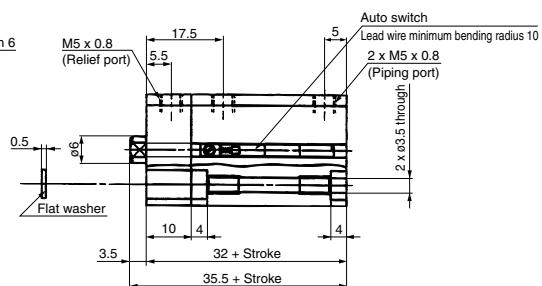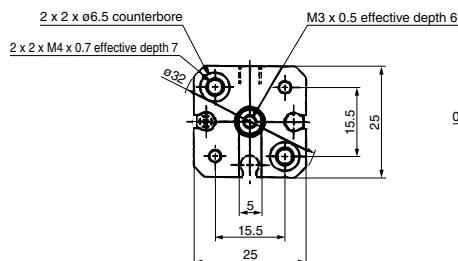



Ø16

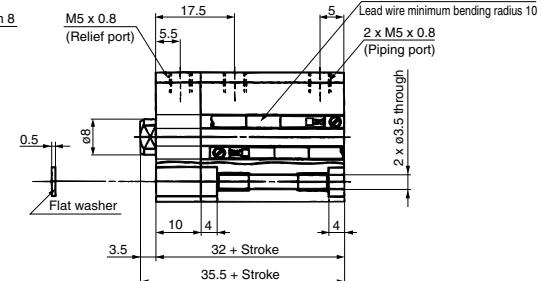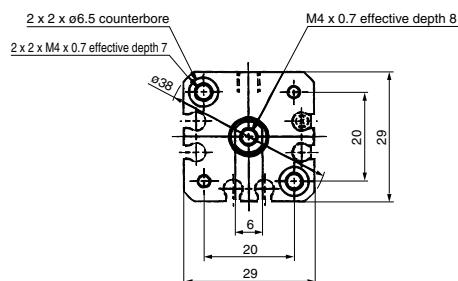

Ø20

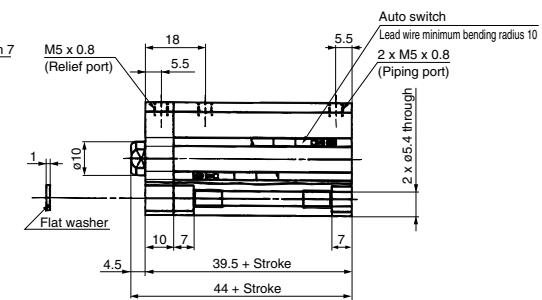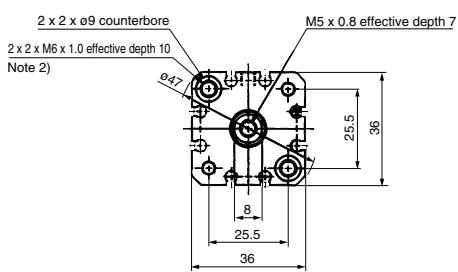

Ø25

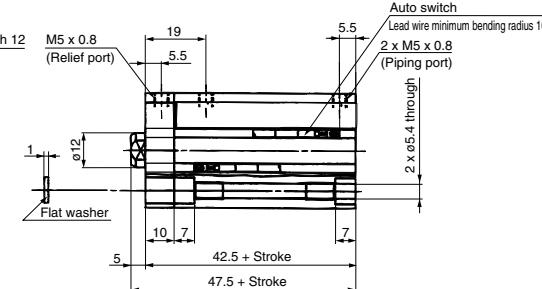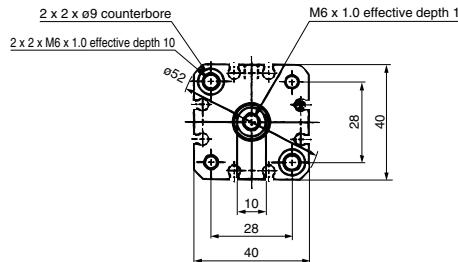


Note 1) Standard strokes available in 5 mm increments.


Note 2) Through-hole in case of 5 mm stroke.

Rod End Male Thread with Auto Switch: 10-CDQSB12 to 25, 21-CDQSB12 to 25


Ø12

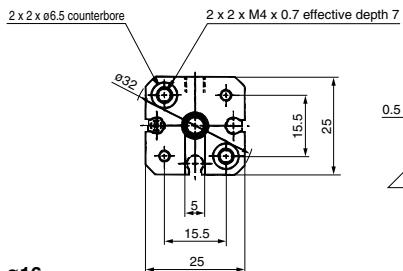


Ø16

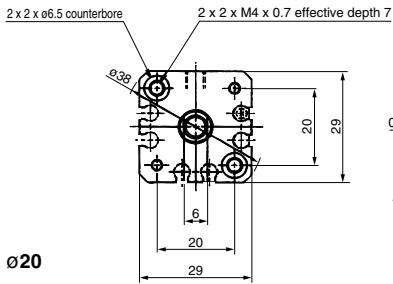

Ø20


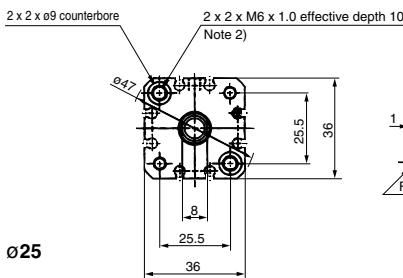


Ø25

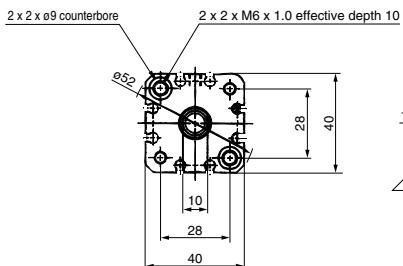

Note 1) Standard strokes available in 5 mm increments.

Note 2) Through-hole in case of 5 mm stroke.

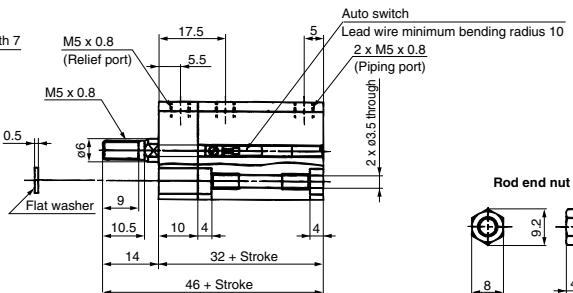

Directional Control Valves

Air Cylinders

Rotary Actuators

Air Grippers

Air Preparation Equipment

Modular F. R.

Pressure Control Equipment

Fittings & Tubing

Flow Control Equipment
Pressure Sensors/Pressure Sensors


Mounting Bolt for CQS

Mounting method: Mounting bolt for through-hole mounting of the CQSB is available as an option.

Refer to the following for ordering procedures.

Order the actual number of bolts that will be used.

Example) CQ-M3 x 35L 2 pcs.

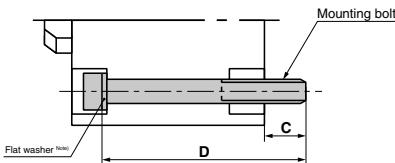



Note) Be sure to use the attached flat washer when mounting a cylinder with through-holes.

Rod side mounting/Without auto switch

		Model	C	D	Mounting bolt
10- 21-	11- 22-	CQSB12-5D	6.5	35	CQ-M3 x 35L
		-10D		40	x 40L
		-15D		45	x 45L
		-20D		50	x 50L
		-25D		55	x 55L
		-30D		60	x 60L
10- 21-	11- 22-	CQSB16-5D	6.5	35	CQ-M3 x 35L
		-10D		40	x 40L
		-15D		45	x 45L
		-20D		50	x 50L
		-25D		55	x 55L
		-30D		60	x 60L
10- 21-	11- 22-	CQSB20-5D	6.5	35	CQ-M5 x 35L
		-10D		40	x 40L
		-15D		45	x 45L
		-20D		50	x 50L
		-25D		55	x 55L
		-30D		60	x 60L
		-35D		65	x 65L
		-40D		70	x 70L
		-45D		75	x 75L
		-50D		80	x 80L
10- 21-	11- 22-	CQSB25-5D	8.5	40	CQ-M5 x 40L
		-10D		45	x 45L
		-15D		50	x 50L
		-20D		55	x 55L
		-25D		60	x 60L
		-30D		65	x 65L
		-35D		70	x 70L
		-40D		75	x 75L
		-45D		80	x 80L
		-50D		85	x 85L

Head side mounting/Without auto switch

		Model	C	D	Mounting bolt
10- 21-	11- 22-	CQSB12-5D	6.5	25	CQ-M3 x 25L
		-10D		30	x 30L
		-15D		35	x 35L
		-20D		40	x 40L
		-25D		45	x 45L
		-30D		50	x 50L
10- 21-	11- 22-	CQSB16-5D	6.5	25	CQ-M3 x 25L
		-10D		30	x 30L
		-15D		35	x 35L
		-20D		40	x 40L
		-25D		45	x 45L
		-30D		50	x 50L
10- 21-	11- 22-	CQSB20-5D	6.5	25	CQ-M5 x 25L
		-10D		30	x 30L
		-15D		35	x 35L
		-20D		40	x 40L
		-25D		45	x 45L
		-30D		50	x 50L
		-35D		55	x 55L
		-40D		60	x 60L
		-45D		65	x 65L
		-50D		70	x 70L
10- 21-	11- 22-	CQSB25-5D	8.5	30	CQ-M5 x 30L
		-10D		35	x 35L
		-15D		40	x 40L
		-20D		45	x 45L
		-25D		50	x 50L
		-30D		55	x 55L
		-35D		60	x 60L
		-40D		65	x 65L
		-45D		70	x 70L
		-50D		75	x 75L

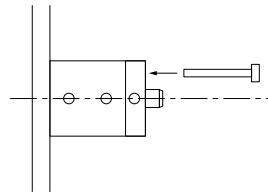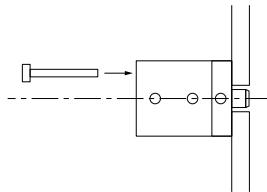


Mounting Bolt for CDQS

Mounting method: Mounting bolt for through-hole mounting of the CDQSB is available as an option.

Refer to the following for ordering procedures.

Order the actual number of bolts that will be used.

Example) CQ-M3 x 40L 2 pcs.

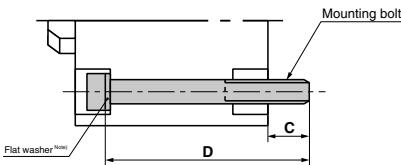

Note) Be sure to use the attached flat washer when mounting a cylinder with through-holes.

Rod side mounting/With auto switch

		Model	C	D	Mounting bolt
10-21-	11-22-	CDQSB12-5D	6.5	40	CQ-M3 x 40L
		-10D		45	x 45L
		-15D		50	x 50L
		-20D		55	x 55L
		-25D		60	x 60L
		-30D		65	x 65L
		CDQSB16-5D		40	CQ-M3 x 40L
10-21-	11-22-	-10D	6.5	45	x 45L
		-15D		50	x 50L
		-20D		55	x 55L
		-25D		60	x 60L
		-30D		65	x 65L
		CDQSB20-5D	6.5	45	CQ-M5 x 45L
		-10D		50	x 50L
10-21-	11-22-	-15D		55	x 55L
		-20D		60	x 60L
		-25D		65	x 65L
		-30D		70	x 70L
		-35D		75	x 75L
		-40D		80	x 80L
		-45D		85	x 85L
		-50D		90	x 90L
		CDQSB25-5D	8.5	50	CQ-M5 x 50L
		-10D		55	x 55L

Head side mounting/With auto switch

		Model	C	D	Mounting bolt
10-21-	11-22-	CDQSB12-5D	6.5	30	CQ-M3 x 30L
		-10D		35	x 35L
		-15D		40	x 40L
		-20D		45	x 45L
		-25D		50	x 50L
		-30D		55	x 55L
		CDQSB16-5D	6.5	30	CQ-M3 x 30L
10-21-	11-22-	-10D		35	x 35L
		-15D		40	x 40L
		-20D		45	x 45L
		-25D		50	x 50L
		-30D		55	x 55L
		CDQSB20-5D	6.5	35	CQ-M5 x 35L
		-10D		40	x 40L
10-21-	11-22-	-15D		45	x 45L
		-20D		50	x 50L
		-25D		55	x 55L
		-30D		60	x 60L
		-35D		65	x 65L
		-40D		70	x 70L
		-45D		75	x 75L
		-50D		80	x 80L
		CDQSB25-5D	8.5	40	CQ-M5 x 40L
		-10D		45	x 45L

