

Made to Order Common Specifications: -XC20: Head Cover Axial Port



28 Head Cover Axial Port


Symbol
-XC20

Head side port position is changed to the axial direction. (Standard head side port is plugged with hexagon socket head screw.)

Applicable Series

Series	Description	Model	Action	Note	Vol. no. (for std model)
CM2	Air cylinder	CM2-Z	Double acting, Single rod Single acting (Spring return/extend)	Except with air cushion	② -1 From P. 172
	Non-rotating rod type	CM2K-Z	Double acting, Single rod Single acting (Spring return/extend)	Except with air cushion	
	Direct mount type	CM2R-Z	Double acting, Single rod	Except with air cushion	
	Non-rotating rod, Direct mount type	CM2RK-Z	Double acting, Single rod	Except with air cushion	
	Smooth cylinder	CM2Y-Z	Double acting, Single rod		
CG1	Air cylinder	CG1-Z	Double acting, Single rod Single acting (Spring return/extend)	Except with air cushion	② -1 From P. 292
	Non-rotating rod type	CG1K-Z	Double acting, Single rod	Except with air cushion	
	Direct mount type	CG1R-Z	Double acting, Single rod	Except with air cushion	
	Non-rotating rod, Direct mount type	CG1KR-Z	Double acting, Single rod	Except with air cushion	
	Smooth cylinder	CG1Y-Z	Double acting, Single rod		


How to Order



Specifications: Same as standard type

* Be sure to use the speed controller since head side port has no throttle.

Construction

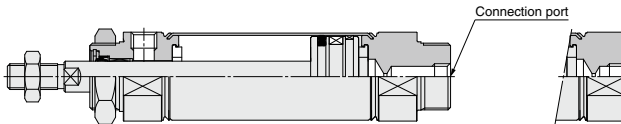

CM2 Series

Bore size (mm)	Port size
20, 25, 32	Rc 1/8
40	Rc 1/4

CG1 Series

Bore size (mm)	Port size
20, 25, 32, 40	Rc 1/8
50, 63	Rc 1/4

* Same dimensions as standard type except port size.